Serreen

常州格林液压设备制造有限公司

CHANGZHOU GREEN HYDRAULIC CO.,LTD

电话（Tel）：0519-85954535　　电话（Mob）：（86）13685276555

传真（Fax）：0519-85954535　　Wechat：（86）13685276555

网址（Url）：www.gelinyy.com　　Cel/Whatsapp：（86）13685276555

邮箱（E-mail）：info@gelinyy.com

地址（Add）：中国江苏省常州市钟楼区新闸镇新旭路京东智能产业园西区15栋

Building 15, West Zone, Jingdong Intelligent Industrial Park, Xinxu Road, Xinzha Town, Zhonglou District, Changzhou City, Jiangsu Province, China

Serreen

·格林液压综合样本

Serreen



GREEN HYDRAULIC

TO CREAT GLOBAL ONE-STOP QUALITY SUPPLIER OF MACHINERY

常州格林液压设备制造有限公司

CHANGZHOU GREEN HYDRAULIC CO., LTD

COMPANY PROFILE
公司简介

让中国机械优品通往全球

LET CHINA'S HIGH-QUALITY MACHINERY PRODUCTS REACH THE WORLD



2007
创立18年
Founded 18 years ago

35名
研发团队
R&D Team

10+
研发专利
R&D Patents

关于我们

常州格林液压设备制造有限公司是一家专注于液压元件、液压系统、自卸车工程机械配件和农业机械配件的生产、研发、制造和销售的专业制造企业拥有18年以上的经验。2017年涉及外贸出口，始终遵循小工厂大贸易的思维理念，以人为本,重视人才。

公司高度重视产品质量,与上海大学战略合作伙伴,已通过IS09001质量体系认证,拥有16项专利。

自格林液压成立以来,我们始终坚持客户第一、诚信共赢的经营理念汇聚了机械领域的精英。公司的核心价值观是:客户第一、诚信共赢、天道酬勤、团结合作、分享利他;基于我公司的核心价值观，我司稳步发展，为全球机械行业增砖添瓦。

ABOUT US

Changzhou Green Hydraulic Co., Ltd. is a professional manufacturer focusing on the production, research and development, manufacturing and sales of hydraulic components, hydraulic systems, dump truck parts and agricultural machinery parts with more than 18 years of experience. In 2017, it was involved in foreign trade exports, always following the thinking concept of small factories and big trade, people-oriented, and valuing talents.

The company attaches great importance to product quality and has established a strategic partnership with Shanghai University. It has passed the IS09001 quality system certification and has 16 patents.

Since Green Hydraulic was founded, we have always adhered to the business philosophy of customer first, integrity and win-win, and have brought together elites in the field of machinery. The company's core values are: customer first, integrity and win-win, God rewards hard work, unity and cooperation, sharing and altruism; Based on our company's core values, our company has developed steadily and contributed to the global machinery industry.

公司区域规划
Company Area Planning




办公区/Office



重要仪式/Important Ceremony


休闲区/Recreation Centre


生产中心/Production Center


装配中心/Assembly Center


备货区/Stocking Center



CORPORATE CULTURE
企业文化

企业愿景 VISION

让中国机械优品通往全球

LET CHINA'S HIGH-QUALITY MACHINERY PRODUCTS REACH THE WORLD

企业使命 MISSION

打造机械领域，全球一站式优质供应商，为了实现全体员工的物质和精神双方面幸福，为了人类社会的进步而努力奋斗。

TO BUILD A GLOBAL ONE-STOP HIGH-QUALITY SUPPLIER IN THE FIELD OF MACHINERY, TO ACHIEVE THE MATERIAL AND SPIRITUAL HAPPINESS OF ALL EMPLOYEES, AND TO STRIVE FOR THE PROGRESS OF HUMAN SOCIETY.

企业价值观 VALUES

- **客户第一**

  CUSTOMER FIRST

- **诚信共赢**

  INTEGRITY AND WIN-WIN

- **天道酬勤**

  GOD REWARDS HARD WORK

- **团队合作**

  UNITY AND COOPERATION

- **分享利他**


  SHARE ALTRUISM

COMPANY ENVIRONMENT


公司环境






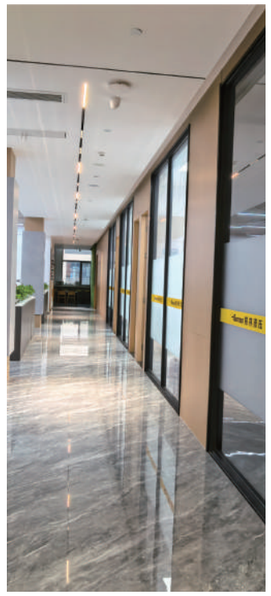



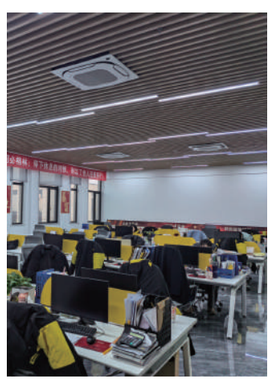



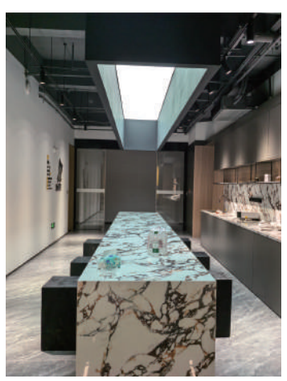


CORPORATE SHOWROOM

公司展厅






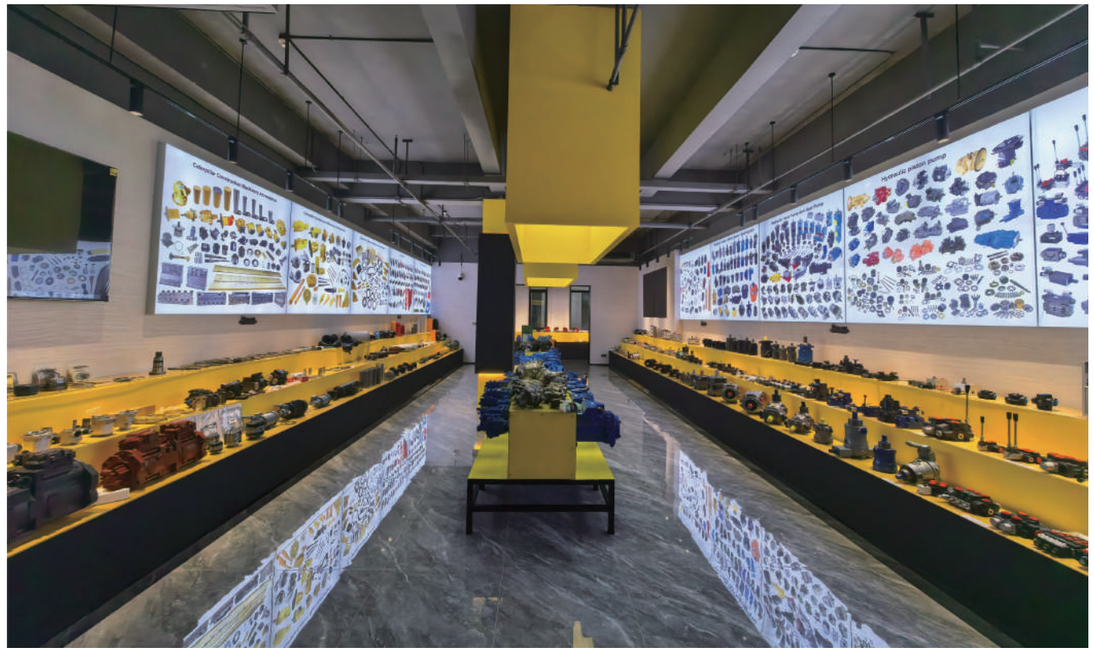





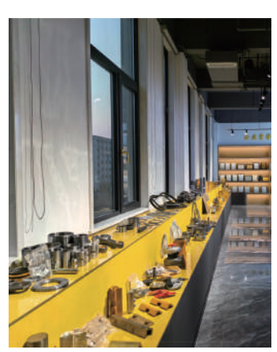


MANUFACTURING EQUIOMENT


生产设备





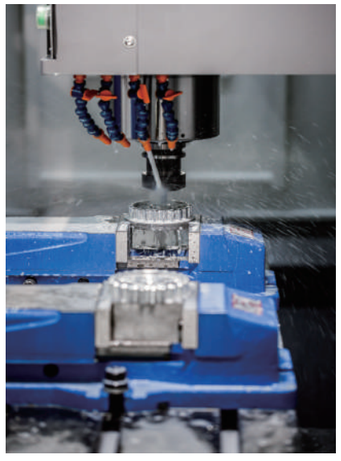



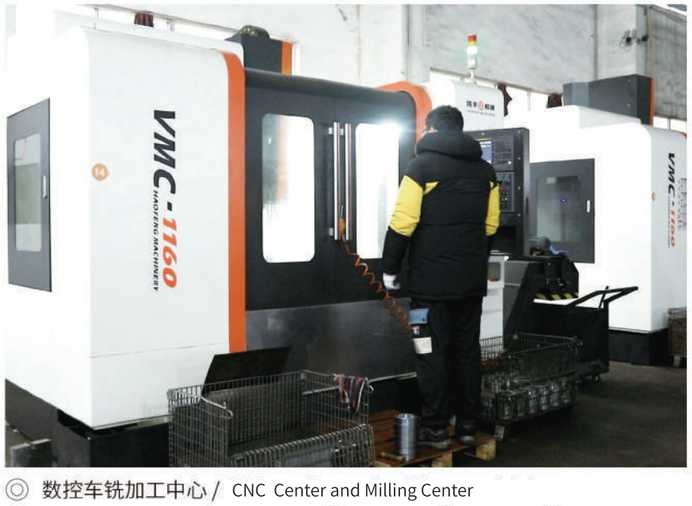


◎ 数控车铣加工中心 / CNC Center and Milling Center



INSPECTION EQUIPMENT

检验设备

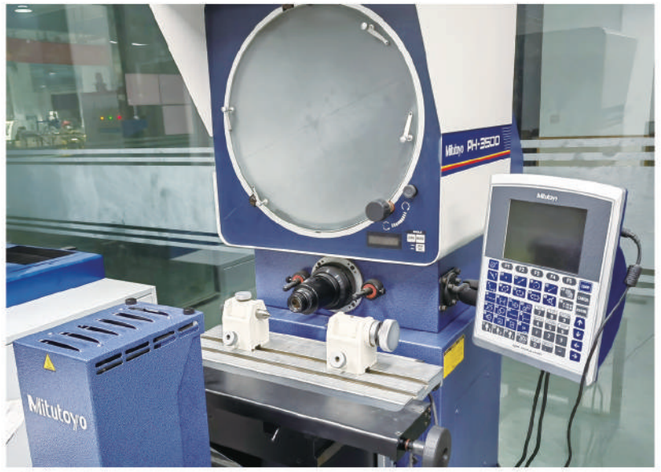


◎ 圆跳动 / Round Beat



◎ 数显洛氏硬度计
Digital Rockwell Hardness Tester



◎ 外圆检测仪 / Outer Circle Detector

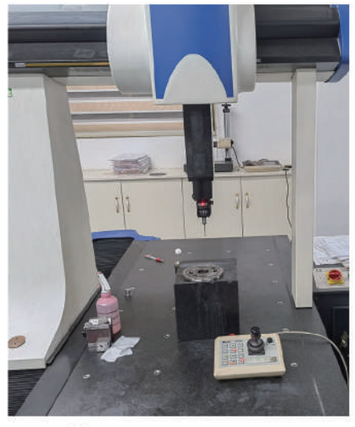

◎ 三坐标仪 / CMM



◎ 粗糙度仪器 / Roughness Instrument



COMPANY EXHIBITION
公司展会

COMPANY EXHIBITION
公司展会













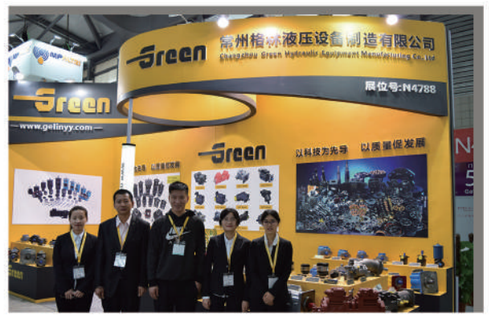


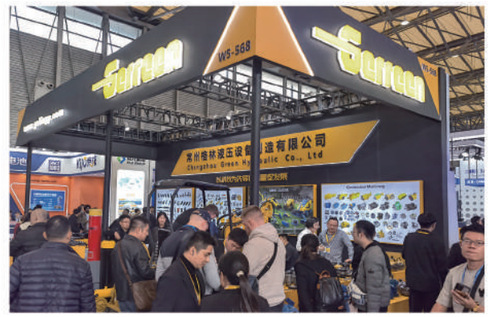
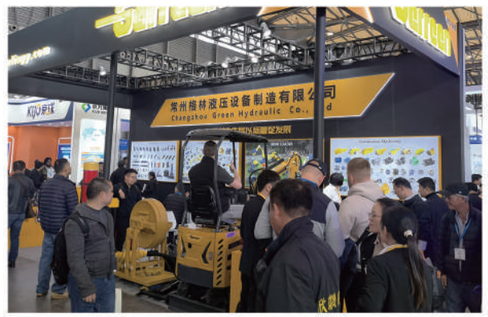








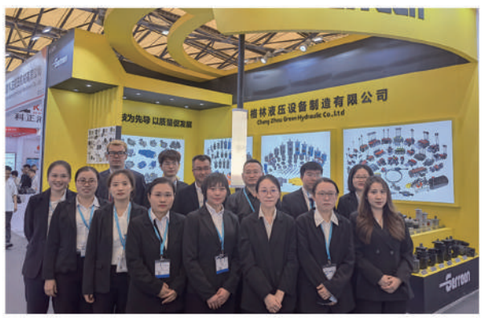






HONORARY QUALIFICATIONS

荣誉资质

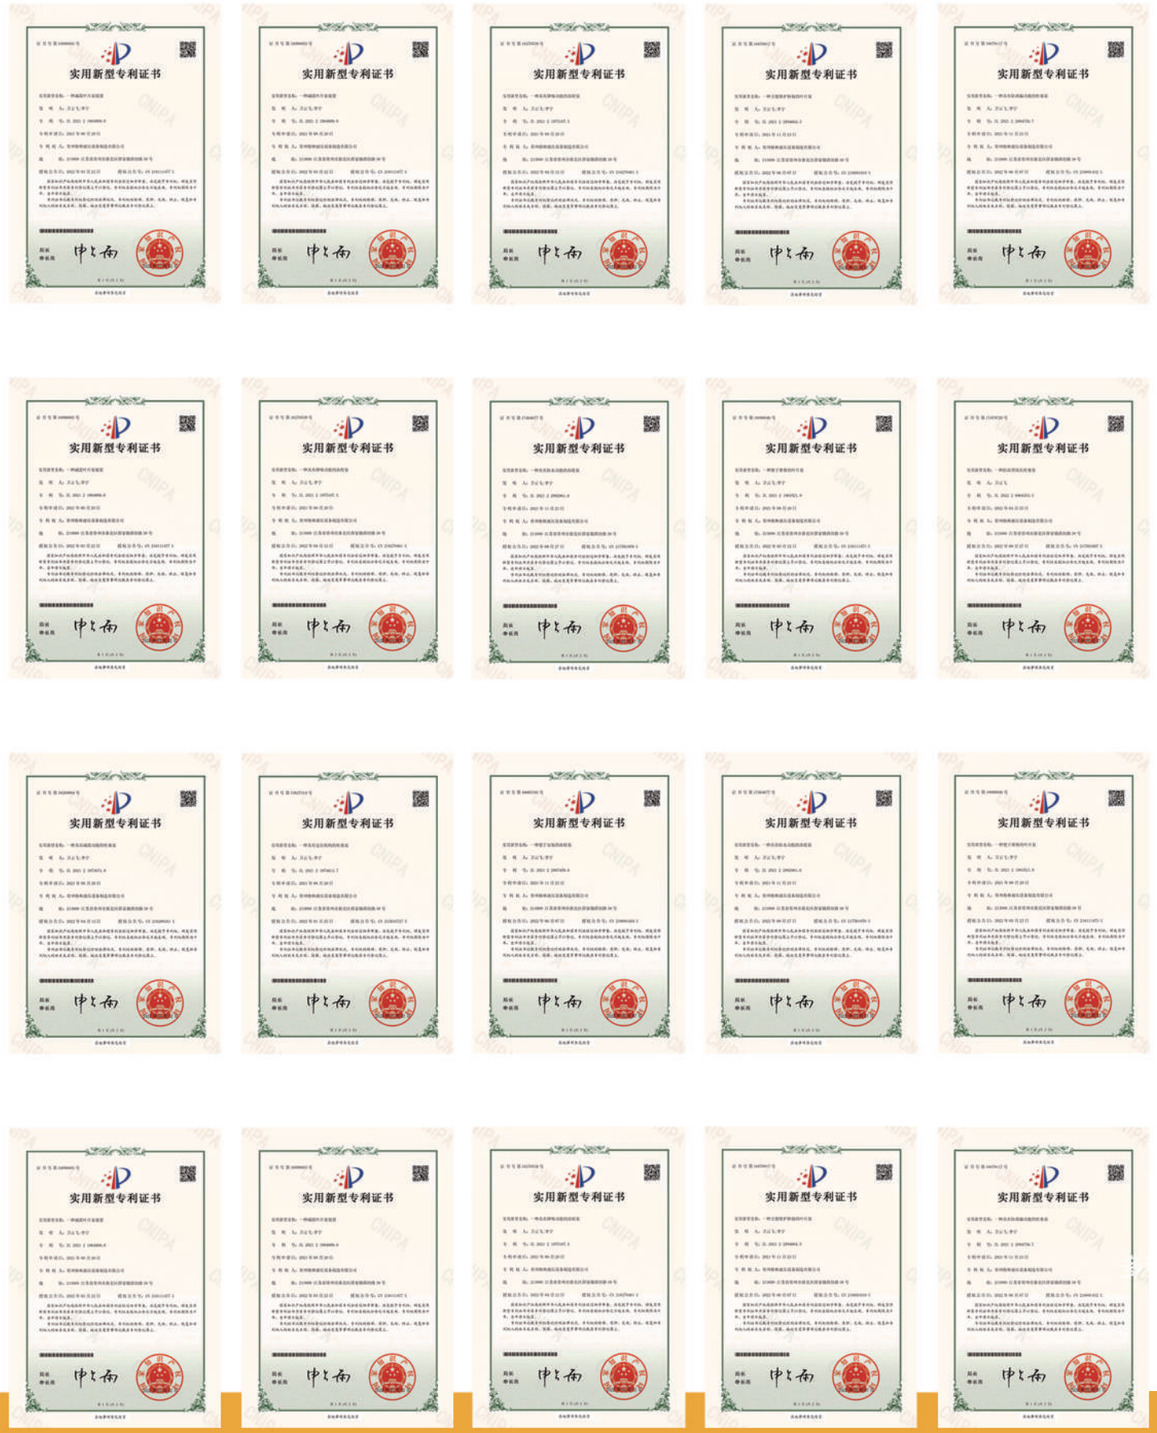

AUTHORITATIVE CERTIFICATION

权威认证

























PUMP PARTS/泵配件



PRODUCT LIST/产品目录

Brand	Tybe
Rexroth	A2F(0)10/12/16/23/28/32/45/56/63/80/90/107/125/160/180/200/250/500/1000
	A4VG28/40/45/50/56/71/90/125/140/180/250 A4VSO40/45/71/125/180/250/355/500
	A6V55/80/107/160/200/225/250 A6VM160/200/500/A6VE160
	A7V16/28/55/80/107/160/200/225/250/355/500 A8V(0)55/80/107/140/160/200
	A10VSO28/45/52/63/71/85/100/140 A10VD(VG)17/18/25/36
	A11V40/60/75/95/200/250/260 AP2D12/16/21/18/25/36
Caterpillar	CAT12G/14G/16G/120/215/245/312C/325C/330B/330C/385H
	AP-12/14 SPK10/10 SBS80/140
Komastu	HPV35/55/90/95/132/135/160/200-8
	PC30UU/40-8/50/60/120/200-3/200-5/200-6/300-7/320/400-6/650/1250 etc
Liebherr	LPVD45/65/75/90/100/125/140/250/260
Linde	HPV55T/080/HPR75/100/105/130/135/160/HMR135 B2PV35/50/75/105/140
	BPV35/50/70/100 BPR140/186/260 BMF50/75/105 BMV75.27
Eaton-vickers	PVB5/6/10/15/20/29/90/110 PVQ10~45 PVH45/57/74/81/98/106/131/141
	PVE19/21/TA19 ADU041/049/062
Parker	VOLV0/F11-005/010/020/28/39/58/150/250 F12-060/080/090/110-MF-1
	PVXS130/180/250/PVX0250/PV180/250/PVL250Parker2145/270/23/P2075/P2105/P2060
	PAVC38/65/100 PVT38/PVT64 SH5V/131
Kawaski	K3V63/112/140/180/280 S/DT/DTP/DTH K5V80/140/160/200 S/DT/DP/DTH/DPH/SH
	K3VG(VL)45~280(DT) K4V45/112 K3SP36C NV45/64/111/137/172/270
	KVC925/930/932 NX15/NVK45 MAG150/170 MX50/150/170/173
	M2X55/63/96/120/146/150/170/210 M5X130/160/180 LZV30/120/LVW060
Danfoss	PV18/20/21/22/23/24/25/26/27/29 PV90-030/050/075/100/130/180/250
	MF16A/035/500 MPV046/M46/MPR63/MPV45 SPV14/15/18 MMF025C
	BRL100 MPT044/M44 HRRO57
Nachi	PVB-2B-32L/34L/36L/38/40/42/63/505 PVD45 YC35-6/PCL-200-18B
	PZ-2B-35/2B-45/3B-70/4B-100/5B-130/6B-180/6B-220
	PZS-3B-70/4B-100/5B-130/6B-180/6B-220 PVS-0B-B/1B-16/1B-22/1B-35/1B-45
	Swing PCR-1B/2B/3B/4B/5B Travel PHV-1B/2B/3B/4B/5B
JIC	JMV-44/22 35/34 64 147/95 155
Hitachi	HPV050/080/091/102/116/118/125/145 ZX120-6/120/200-3/270/330-2
	EX60-2/120-2/200-2/200-5/300-2
Kobelco	SK200-1/3/6 250-8320430etc
Nabtescc	GM05VL/05VA/06VL/07VA/08/09/10/17/18/21/23/30H/35VA/35VL/38VB
Kayaba	PSV-10/-16/2-10/2-16 PSVD2-13E/W-17E/2-21E/2-27E PSVL-42/-54
	MSF-18/-23 MAG-12V-120E/18V-230F/33V-550F/170VP-3800G/18VP-220 etc.
	MSG-27P-10E/27P-16E/27P-23E/50P-21
Toshiba	PCV65R/80R/90R/110 RPVB92 SG02/025/04/08/12/20
Tokiwa	MKV23/MKV33
Hawe	V30D45/95/145/250 V60
Tadano	Tadano 100/150
Yuken	A16/A22/A37/A45/A56/A70/A90/A145
Harvester	HPVMF23(T23C)/HPVMF23.7/T28C/T30C/T37C
Oilgear	PVM-018/02B PVG130
Brevini	ED2090/2150/2250
Bonfiglioli	BFL309/310/311
Dinamic	RE1022/RE1023
Yuken	DG-01 BG-03/06/10 S-BSG-03/06/10 DSG-01/03 DSHG-04/06/10
	CIT/CGR-03/06/10 CPG-03/06/10 RG-03/06/10 SRG3/06/10 EFBG-03/06
	FG-01/02/03/06 ED-01 EBG-03/06/10 MBP/MSW/MPW-01/03/04/06



PISTON PUMP/柱塞泵



PISTON PUMP PARTS/柱塞泵配件



VANE PUMP/叶片泵



GEAR PUMP/齿轮泵



HYDRAULIC VALVE/液压阀



MOTOR/马达




















HYDRAULIC COMPONENTS/液压元件













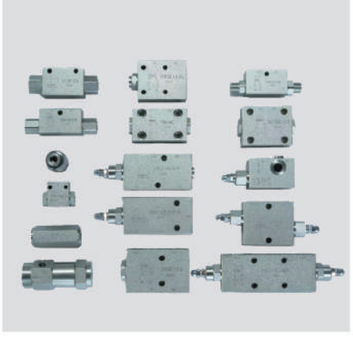




SERVO SYSTEM/伺服系统

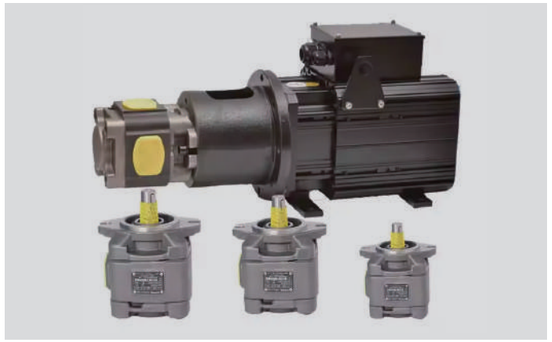




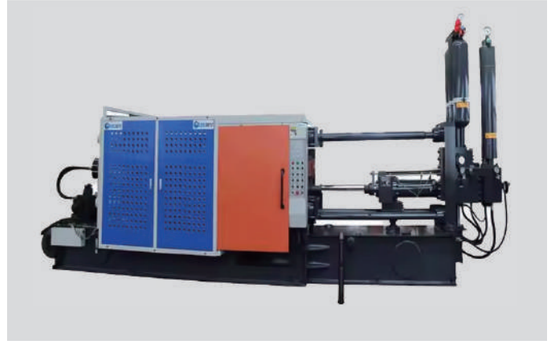

OTHER COMPONENTS/其他元件





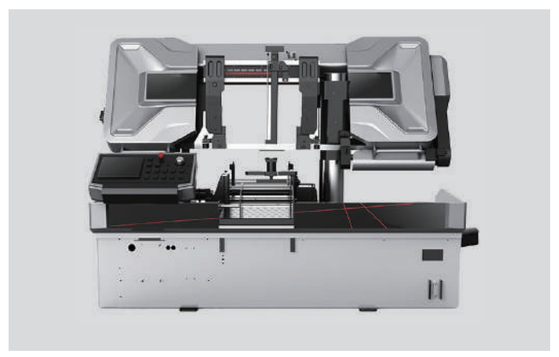




HYDRAULIC COMPONENTS/液压元件










CRIMPING MACHINE/扣管机











WINCH/绞盘





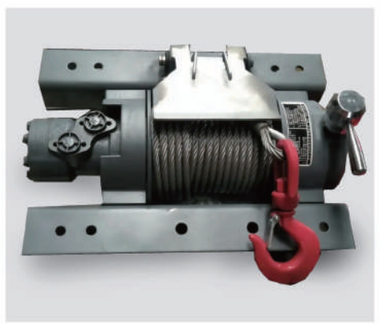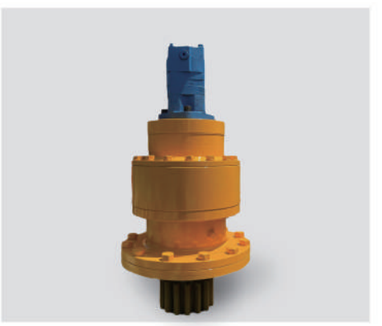



Z.联轴器、泵支架

1.ML型梅花弹性联轴器----------852

2.ML型聚氨酯梅花弹性垫----------853

3.NL 型齿式弹性联轴器----------854

4.NL型齿式联轴器尼龙齿套----------855

5.XL/GR 星型弹性联轴器----------856

6.GR星型弹性联轴器缓冲垫----------857

7.L型三爪联轴器----------858

8.TGL系列曲面齿联轴器----------859

9. XL/GR 星型弹性联轴器夹紧型----------860

10.JM 型弹性膜片联轴器----------861

11.铝制钟型罩----------862




ML型梅花弹性联轴器

ML type plum blossom elastic coupling

结构简单，传递力矩大，噪音小，承载能力较高；
具有补偿两轴相对位移功能，弧线接触，使用寿命长；
适用于联接两同轴线、起动频繁、正反变化、中低速、大小功率传动轴

Simple structure,big transmission,lower noise and high bearing capacity.
it has the function of compensating the relaive displacement of the two axes, arcs contact and the long service life
it is suitable for connecting two coaxial lines, frequent starting, positive and negative changes, middle and low speed
large and small power transmis



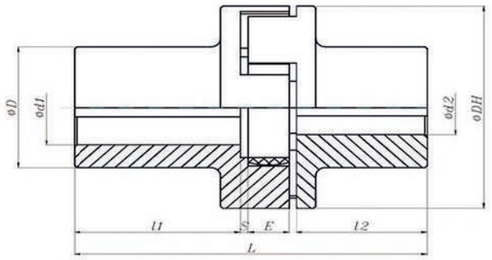

型号Model	DH	D	d1，d2最大信 Maximum value	l1，l2最大值 Maximum value	S	F	瓣数 The number of petal	公称扭矩 Nominal torgue N.m	许用转速 Allowable speed r/min
ML1	50	40	24	52	1.5	12	4	25	15300
ML2	70	50	32	62	2	18	6	100	10900
ML3	85	60	38	82	2	18	6	140	9000
ML4	105	65	42	112	2.5	20	6	250	7300
ML5	125	75	48	112	3	25	6	400	6000
ML6	145	85	55	112	3	30	6	630	5300
ML7	170	100	65	145	3.5	30	8	1120	4500
ML8	200	120	75	145	4	35	8	1800	3800
ML9	230	150	95	172	4.5	35	10	2800	3300
ML10	260	180	110	212	5	45	10	4500	2900
ML11	300	200	120	212	5.5	50	10	6300	2500
ML12	360	225	130	252	6	55	12	11200	2100
ML13	400	250	140	252	6	55	12	12500	1900

订货描述 Order description	名称 Name	型号Model	内孔φd1"轴孔长l1/内孔Φd2*轴孔长l2 The inner holepdl Axal length l1/The inner hole pdi Axial length l2
	联轴器 Coupling	ML3	φ16*40φ38*80


Z


ML型聚氨酯梅花弹性垫

ML polyurethane plum blossom elastic cushion

产品用途:梅花型弹性联轴器是一种先进的联轴器接收装置。广泛应用于轧钢、起重、压、石油等大型设备和其它各种机械设备的传动轴端联接。

Product use: the plum blossom spring coupling is an advanced coupler receiving device.Widely used in steelrolling,lifting, forging, oil and other large equipment and other mechanical equipment of the transmission shaltconnection.

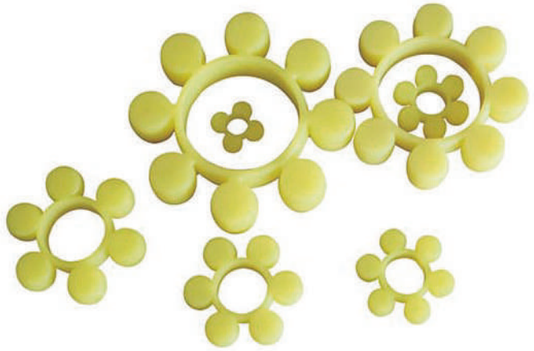

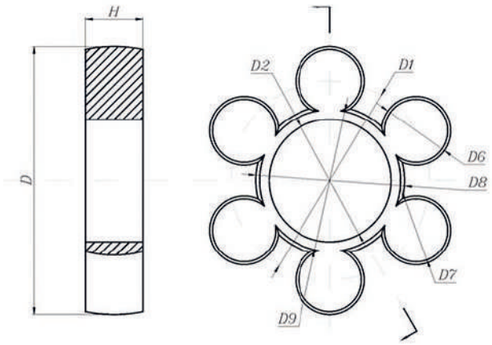

型号Model	D	D1	D2	D9	D8	D7	D6	H	齿数 The number of teeth	重量/克 Weight/gram
ML1	48	30	19	23	25	16	18	12	4	
ML2	68	48	28	34	36	18	20	18	6	46
*ML2	66	47	28	33	35	17	19	18	6	46
ML3	82	60	33	42	44	20	22	18	6	60
*ML3	89	59	33	41	43	20	22	18	6	60
ML4	100	72	42	51	54	25	28	20	6	105
ML5	122	90	52	62	65	29	32	25	6	175
ML6	140	104	65	71	78	33	36	30	6	265
ML7	166	130	90	100	105	33	36	30	8	355
ML8	196	156	100	112	117	37	40	35	8	540
*ML8	194	155	100	112	115	35	39	35	8	500
ML9	225	180	115	130	135	42	45	35	10	850
ML10	255	205	140	154	160	46	50	45	10	1300
*ML10	255	200	150	162	168	40	45	45	10	1030
ML11	295	245	170	187	195	46	50	50	10	1560
ML12	356	300	215	235	245	51	56	55	12	2400
ML13	391	335	250	275	285	51	56	55	12	2650

注:*非标尺寸ML型梅花垫 Note:*ML type plum padnon standard size


NL型齿式弹性联轴器

NL type toothed elastic coupli

使用简单,易维修,缓冲吸振;
可补偿较大的轴向位移,微量的径向位移和角位移;
适用于正反向变化多,启动频繁的高速轴。

Easy to use,easy to repair, buffer vibration;
Compensable large axial displacement, micro radial displacement and angular displace;
It is suitable to change many reverse changes and start the high speed shaft.



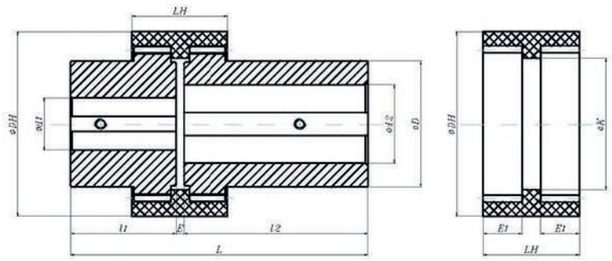

型号Model	DH	LH	D	d1,d2最大值 Maximum value	l1,l2最大值 Maximum value	E	K	齿数 The number of teeth	模数 Modulus	适用电机功率最大值(KW) Maximum power of motor(kw)	公称扭矩N.m Nominal torque N.m
NL1	40	40	26	16	25	5	27	20	1.5	0.75	40
								32	1		
NL2	57	35	36	24	50	6	39	28	1.5	1.1	100
								48	1		
NL3	68	45	474	28	60	6	46	25	2	4	160
								34	1.5		
NL4	82	47	58	38	80	8	61	32	2	7.5	250
								45	1.5		
NL5	93	50	68	42	110	10	70	36	2	15	315
								38	2		
NL6	102	52	70	48	110	12	77	40	2	22	400
								32	2.5		
								41	2		
NL7	116	60	80	55	110	11	84	36	2.5	30	630
								42	2		
								45	2		
NL8	140	72	96	65	140	11	101	36	3	55	1250
								42	2.5		
								45	2.5		
								31	3		
大NL9	175	93	124	80	170	16	129	45	3	90	2000
								46	3		
NL10	220	80	157	95	170	19	167	44	4	180	3150

订货描述 Order description	名称 Name	型号Model	内孔Φd1"轴孔长l1/内孔Φd2*轴孔长l2 The inner holepdl Axal length l1/The inner hole pdi Axial length l2
	联轴器 Coupling	ML3	Φ25*40Φ28*80

NL型齿式联轴器尼龙齿套

NL tooth coupling nylon slee

NL联轴器是目前国内的最新产品，在国内外已经广泛地被采用，该产品由机械委济南铸造锻压机械研究所设计，适用于轴间及挠性传动，允许较大的轴向径向位移和角位移，并具有结构简单、维修方便拆装容易、噪声低、传动功效损失小、使用寿命长等优点，倍受用户欢迎。

为满足各种机械的更新改选及引进设备备件需要，我厂可以提供品种规格齐全的内齿形弹性联轴器并且根据用户需要接受非标准订货。

NL coupling is the latest product in China. lt has been widely used at home and abroad. The product is designed by the Ji'nan Institute of foundry and forging machinery, and is suitable for inter axle and flexible transmission.lt allows larger axial radial displacement and angular displacement, and has the advantages ofsimple structure.convenient maintenance, easy disassembly and assembly, low noise, little loss of transmission efficiency and long service life. lt is welcomed by users.

In order to meet all kinds of mechanical renewal and selectionand equipment spare parts, our factory can provide all kinds ofinternal tooth elastic couplings with various specifications,and acceptnon-standard orders according to users'needs.



NL型齿联轴器尼龙齿套产品目录

NL Type Gear Coupling Nylon Gear Bushing Product Catalog

名称 Name	型号 Model	齿数 The number of teeth	模数 Modulus
尼龙套 Nylonjacket	NL1	32/30齿	1/1.5
尼龙套 Nylonjacket	NL2	42/28齿	1/1.5
尼龙套 Nylonjacket	NL3	25/34齿	2/1.5
尼龙套 Nylonjacket	NL4	32/45齿	2/1.5
尼龙套 Nylonjacket	NL5	36/38齿	2
尼龙套 Nylonjacket	NL6	32/40齿	2.5/2
尼龙套 Nylonjacket	NL7	45/36齿	2/2.5
尼龙套 Nylonjacket	NL8	31/36/42/45齿	3/2.5
尼龙套 Nylonjacket	NL9	45/46齿	3
尼龙套 Nylonjacket	NL10	44齿	4

Z


XL/GR星型弹性联轴器

XL/GR star type flexible coupling

聚氨脂弹性体由凸型爪块限制，可避免由于冲击产生的内部变形及离心力产生的外部变形；
凸爪大的凹面，可减小渐开线齿上的表面压力；
具有补偿两轴相对偏移、缓冲、减震、耐磨性能:
适用于联接两同轴线的传动轴系，适应场合普遍。

The polyurethane elastomer is restricted by the convex claw block,which can avoid the internal delormalion caused by the impact and the external deformation caused by the centrifugal force;
A large concave surface that reduces the surface pressure on the involute teeth;
lt has the compensation of two axis relative offset, buffer, shock absorption and wear resistance;
lt is suitable for the transmission shafting of the two coaxial line, which is widely used in the situati



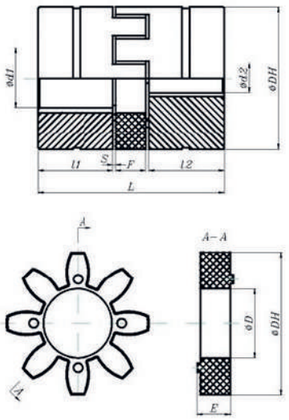

型号Model	DH	d1，d2最大信 Maximum value	l1，l2	F	S	D	E	瓣数 The number of petal	公称扭矩 Nominal torgue N.m	许用转速 Allowable speed r/min
XL0	30	16	18	13	1.5	40	12	4	15	19000
XL1	40	19	25	16	2	50	14.5	8	20	19000
XL2	55	24	30	18	2	60	15.2	8	70	14000
XL3	65	28	35	20	2.5	65	19	8	190	11800
XL4	80	38	45	24	3	75	22	8	380	9500
XL5	95	42	50	26	3	85	24	8	530	8000
XL6	105	48	56	28	3.5	100	25.5	8	620	7100
XL7	120	55	65	30	4	120	27	8	820	6300
XL8	135	65	75	35	4.5	150	32	8	1250	5600
XL9	160	75	85	40	5	180	37	10	1950	4750
XL10	200	90	100	45	5.5	200	42	10	4800	3750
XL11	225	100	110	50	6	225	42	10	6300	3350
XL12	255	110	120	50	6	250	42	10	8000	3000

订货描述 Order description	名称 Name	型号Model	内孔φd1"轴孔长l1/内孔Φd2*轴孔长l2 The inner holepdl Axal length l1/The inner hole pdi Axial length l2
	联轴器 Coupling	XL3	φ16*35φ28*35


Z


GR星型弹性联轴器缓冲垫

GR Star shaped elastic coupling cushion

产品用途:用于各种传动机械联轴器缓站作用于传动轴的联接。材 质:聚氨酯TPU.CPU
产品硬度:90±2°A
扭矩:22.4'2500N.M
阿克隆磨耗:<0.05C㎡/1.61km
标准来源: 德国KTR

Product use: it is used to connect the slow station ofvarious transmission machinery coupling to the transmission shaft.
Texture ofmaterial: polyurethane TPU.CPU
Producthardness:90±2°A
Torque:22.4'2500N.M
akronabrasion:<0.05Cm²/1.61km
Standard source:GermanyKTR

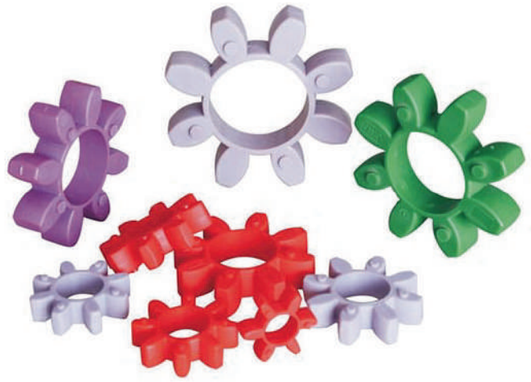



型号Model	D外径 D outer diameter	d外径 d inner diameter	H1高度 H1 height	H2高度 H2 height	瓣数 The number of petals	价格 Price
GR-19	40	18	14.5	12	6	
GR-24	54	26	15.2	14	8	
GR-28	65	30	19	15	8	
GR-38	50	38	22	18	8	
GR-42	95	46	24	20	8	
GR-48	104	51	25.5	20.5	8	
GR-55	120	60	27	22	8	
GR-65	135	68	32	26	8	
GR-75	161	81	37	30	10	
GR-90	199	100	42	34	10	
GR-100	224	111	42	38	10	
GR-110	255	121	42	38	10	


Z


L型三爪联轴器


L-Type Three-claw Coupling

产品结构:由两个烧结合金或铝合金凸扑件加一个NBR橡胶垫组成。
配轴径:9mm-75mm
产品特点:
能有效吸收动力衡击;
安全方便、简单、成本低、骨绩小;
耐高温、同油性佳、免保养;
最大持力达54.2kg-m;
容许偏差:径向偏差:0.3mm
角度偏心:1。,轴向偏差:+0.5mm

Product structure: consists of two sintered alloys or aluminum alloy convex parts and a NBR rubber
Axial diameter:9mm-75mm
Product features: Effective absorption;
Safe and convenient,simple, low cost and small bone perfor;
High temperature resistance. qood oil property and no maintenance;
The maximum holding force 54.2kg-m;
Admissible deviation:Radial deviation:0.3mm
Angle eccentricity:1。,Axial deviation: +0.5mm

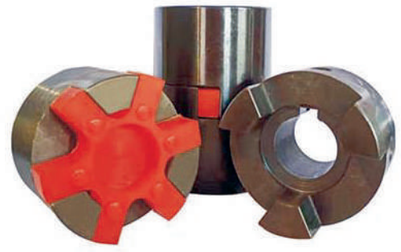






产品型号 Product model	常用扭力kg-m Common torsion kg-m	标准孔径 Standard aperture	最高转速rpm Maximum speed rpm	最大孔径 Max aperture	A	B	C	D	E	重量kg WeightKC
L035	0.05	-	30000	9	16	21	8	6.5	-	0.03
L050	0.3	ϕ11ϕ14	17000	16	27.4	43	12	15.5	-	0.13
L070	0.5	ϕ11ϕ14ϕ19	10000	19	35	51	13	19	-	0.24
L075	1	ϕ11ϕ14ϕ19	9000	24	45	54	13	20.5	-	0.4
L090	1.6	ϕ14ϕ19ϕ24	9000	25	64	55	13	21	-	0.68
L095	2.2	14 19 24 28	7000	28	54	64	13	25.5	-	0.71
L100	5.0	ϕ19 ϕ24 ϕ28 ϕ32	5000	38	66	89	19	35	-	1.4
L110	9.0	ϕ24 ϕ28 ϕ32 ϕ38 ϕ42	5000	42	84	108	22	43	-	3
L150	15.0	ϕ28 ϕ32 ϕ42 ϕ48	5000	48	96	115	25	45	80	5.02
L190	20.0	-	5000	55	115	124	25	54	102	7.6
L225	30.0	-	4200	65	127	154	26	64	108	9
L275	54.2	-	4200	75	157	200	41	79	127	21

Z

TGL系列曲面齿联轴器

TGL Series Curved gear coupling

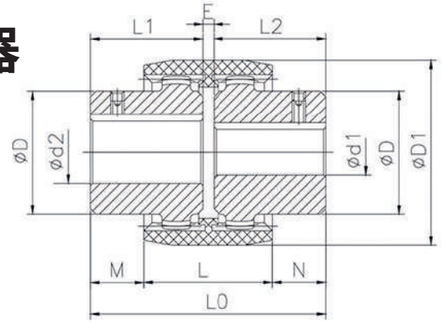

产品特点

双节式曲面齿联轴器

广泛应用于各种机械和液压领域

尼龙和纲的材料配合，免维护

可以补偿轴向、径向、角向误差

轴向插入装配，非常方便

成品孔径公差按照ISO标准为H7，键槽宽公差

按照标准DIN6885/1为JS9，另有锥孔和英制孔

安装尺寸见下表:

Product features

Double section curved surface coupling

Widely used in various fields of machinery and hydraulics

Non maintenance ofnylon and steel material

Compensation for axial, radial and angular errors

The axial insert assembly is very conveniente

The product hole tolerance is H7 according to the ISO standard,

and the tolerance of keyway width is in accordance with the standard,

DIN6885/1byJS9, Another inch and the cone hole

Forinstallation size,see the table below:





产品型号 Product model		成品孔 Finished bore d1, d2			尺寸(mm) Dimensions								最大孔径时联轴器重量 Coupling Weight with Max,Aperture		额定转矩 Rated Torque
普通型 General	加长型 Lengthened	预置孔 Premachined Bome		最大孔径 Max aperture	l1,l2	L0	L	M,N	E	加长轴套 l1,l2, Max	D1	D	尼龙套重量kg Weight of Nyilon-seelve	重量kg Totak Weight	N.M
TGL-14	TGL-14-L	-	成品孔可按客户要求制作 Customers could order finished bores.	14	23	50	37	6.5	4	40	40	24	0.02	0.14	10
TGL-19	TGL-19-L	-		19	25	54	37	8.5	4	40	48	30	0.03	0.21	16
TGL-24	TGL-24-L	-		24	26	56	41	7.5	4	50	52	36	0.04	0.25	20
TGL-28	TGL-28-L	-		28	40	84	46	19	4	55	66	44	0.07	0.62	45
TGL-32	TGL-32-L	-		32	40	84	48	18	4	55	76	50	0.09	0.83	60
TGL-38	TGL-38-L	-		38	40	84	48	18	4	60	83	58	0.11	1.04	80
TGL-42	TGL-42-L	-		42	42	88	50	19	4	60	92	65	0.14	1.41	100
TGL-48	TGL-48-L	-		48	50	104	50	27	4	60	92	67	0.16	1.43	140
TGL-55	TGL-55-L	-		55	52	108	58	25	4	65	114	82	0.26	2.50	240
TGL-65	TGL-65-L	-		65	55	114	68	23	4	70	132	95	0.39	3.58	380


Z

XL/GR星型弹性联轴器夹紧型

XL/GR star type flexible coupling clamp type

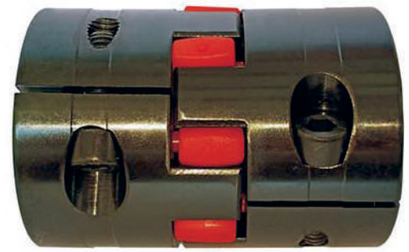

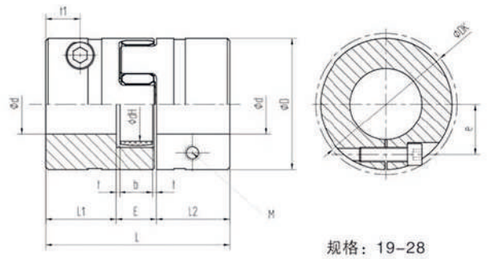

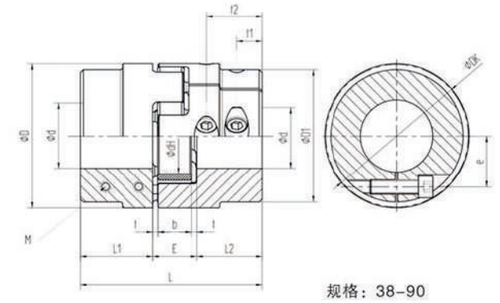

型号 Model TGL-DK	成品孔 Finished Bore	尺寸 Dimension												
	dmax	L	L1,L2	E	b	t	D	dH	DH	t1	t2	e	M	T
19	20	66	25	16	12	2	40	18	46	12	-	14.5	M6	14
24	28	78	30	18	14	2	55	27	57.5	12	-	20	M6	14
28	38	90	35	20	15	2.5	65	30	73	14	-	25	M8	35
38	42	114	45	24	18	3	80	38	77.5	19	-	26.5	M8	35
42	50	126	50	26	20	3	95	46	93.5	18	-	32	M20	69
48	55	140	56	28	21	3.5	105	51	105	21	-	36	M12	120
55	68	160	65	30	22	4	120	60	119.5	26	51	42.5	M12	120
65	70	185	75	35	26	4.5	135	68	132.5	33	61	50	M12	120
75	80	210	85	40	30	5	160	80	158	36	68	57	M16	295
90	90	245	100	45	34	5.5	200	100	197	40	80	72	M20	580

选型举例:Example:


RGE42	S	DK	T	B	ϕ24	ϕ25	98	平键 Flat Key	否 NO	
产品规格 Specification	钢件 Steel	结构 Structure	调质 Tempering	发黑 Blackening	孔径 Aperture	孔径 Aperture	弹性体硬度 Elastomer haroness	键槽类型 Keyslot	是否做动平衡 Whetner dynamic balanced	备注 Note

Z

JM型弹性膜片联轴器的基本参数与尺寸

Basic parameters and dimensions of JM type elastic diaphragm coupling



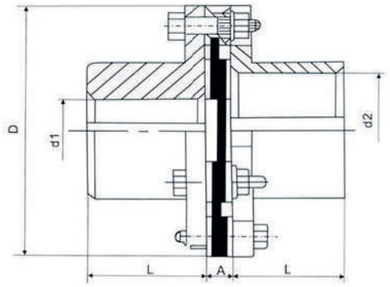

型号 Model	公称转距 N.m Nominal torque	最大转矩 N.m Maximu-mtorque	最大转速 rpm Maximu-speed	孔轴直径d1、d2mm Axial hole diameter d1、d2	轴孔长度mm Axial length J1型 L	轴孔长度mm Axial length Y型 L	mm	Amm	重量 kg weight	转动惯量 kg.rrr Moment of inertia
JM1	40	63	10700	14	27	32	JM1	JM1	JM1	JM1	JM1
				16、18、19	30	42					
				20、22、24	38	41					
				25、28	44	62					
JM2	63	100	9300	20、22、24	38	52	JM2	JM2	JM2	JM2	JM2
				25、28	44	62					
				30、32、35、38	60	82					
JM3	100	200	8400	25、28	44	62	JM3	JM3	JM3	JM3	JM3
				30、32、35、38	60	82					
				40、42、45	84	112					
JM4	250	400	6700	30、32、35、38	60	82	JM4	JM4	JM4	JM4	JM4
				40、42、45、48、50、55	84	112					
JM5	500	800	5900	35、38	60	85	JM5	JM5	JM5	JM5	JM5
				40、42、45、48、50、55、56	84	112					
				60、63、65	107	142					
JM6	800	1250	5100	40、42、45、48、50、55、56	84	112	JM6	JM6	JM6	JM6	JM6
				60、63、65、70、71、75	107	142					
JM7	1000	2000	4750	45、48、50、55、56	84	112	JM7	JM7	JM7	JM7	JM7
				60、63、65、70、71、75	107	142					
				80	132	172					
JM8	1600	3150	4300	50、55、56	84	112	JM8	JM8	JM8	JM8	JM8
				60、63、65、70、71、75	107	142					
				80、85	132	172					
JM9	2500	4000	4200	55、56	84	112	JM9	JM9	JM9	JM9	JM9
				60、63、65、70、71、75	107	142					
				80、85	132	172					
JM10	3150	5000	4000	55、56	84	112	JM10	JM10	JM10	JM10	JM10
				60、63、65、70、71、75	107	142					
				80、85、90	132	172					
JM11	100	200	8400	60、63、65、70、71、75	107	142	JM11	JM11	JM11	JM11	JM11
				80、85、90、95、	132	172					
JM12	100	200	8400	60、63、65、70、71、75、	104	252	JM12	JM12	JM12	JM12	JM12
				80、85、90、95	132	172					
				100	167	212					
JM13	100	200	8400	63、65、70、71、75	107	142	JM13	JM13	JM13	JM13	JM13
				80、85、90、95	132	172					
				100、110	167	212					
JM14	100	200	8400	65、70、71、75	174	142	JM14	JM14	JM14	JM14	JM14
				80、85、90、85	132	172					
				100、110	167	212					
JM15	100	200	8400	70、71、75	107	142	JM15	JM15	JM15	JM15	JM15
				80、85、90、95	132	172					
				100、110、120、125	167	212					
JM16	100	200	8400	75	107	142	JM16	JM16	JM16	JM16	JM16
				80、85、90、95	132	172					
				100、110、120、125	167	212					
				130	202	252					
JM17	100	25000	2300	80、85、90、95	132	172	JM17	JM17	JM17	JM17	JM17
				100、110、120、125	167	212					
				130、140	202	252					
JM18	20000	31500	2150	90、95	132	172	JM18	JM18	JM18	JM18	JM18
				100、110、120、125	167	212					
				130、140、150	202	252					
				160	242	302					
JM19	25000	40000	1950	100、110、120、125	167	212	JM19	JM19	JM19	JM19	JM19
				130、140、150	202	252					
				160、170	242	302					
JM20	31500	50000	1850	100、120、125	167	212	JM20	JM20	JM20	JM20	JM20
				130、140、150	202	252					
				160、170、180	242	302					

铝制钟型罩

Aluminum bell cover

用于连接IEC标准电机和液压油泵;


电机轴与泵轴自动对中:


钟型罩底部不是实体而是有加强筋的;


侧面有透气孔，并配有网状护罩，安全方便的观察机器运转情况;

可用于重负荷，有切边和不切边两种形式，可供立式、卧式电机的选择。

It is used to connect IEC standard motor and hydraulic oil pump;
The motor shaft and the pump shaft are automatically centered;
The bottom of the bell jar is not a solid but has a rib;
There are venting holes on the side and equipped with a mesh shield to observe the operation of the machine safely and conveniently;
It can be used for heavy load, with both trimming and non-cuting sides, which can be used for vertical and horizontal motors.







型号Model	A	B	B_1	B2最小值	B3	L	M	KWn=1450
PK140	140	115	95	47	97	110	M8	
PK150	150	130	110	38	115	110	M8	
PK200	200	165	130	30	129	110	M10	0.55-1.5KW
				40	127	140		
				40	127	145		
PK250	250	215	180	35	178	120	M12	2.2-4KW
				38	178	137		
				40	178	160		
PK300	300	265	230	38	185	155	M12	5.5-7.5KW
				38	170	195		
PK350	350	300	250	76	229	188	M16	11-22KW
				76	230	204		
				76	234	228		
PK400	400	350	300	97	288	204	M16	30KW
				97	286	228		
				97	284	256		
PK450	450	400	350	97	276	234	M16	37-45KW
				91	297	262		
				97	276	285		
				97	276	315		

产品详情图片 Product picture


TGL型联轴器
TGL Coupling


油 封
Oil Seal


弹性垫
Cushion


膜片连轴器
Diaphragm coupling


橡胶件
Rubber Part


芯型橡胶体
Core-type Rubber Part


轮胎体
Tyre



铝合金联轴器
Aluminum alloy Coupling


聚胺脂L型垫
L type Polyurethane Part


橡胶梅花垫
Plum type Rubber Part


NM橡胶垫
NM Rubber Part


橡胶垫
Rubber Part


橡胶L型垫
L type Rubber Part


星型垫
Star type Rubber Part


尼龙件
Nylon Part



弹性垫
Cushion


L型连轴器
L type Coupling


万向节连轴器
U-joint Coupling


锥套膜片连轴器
Tapered and Diaphragm coupling


弹性垫
Cushion


十字滑块联轴器
Oldham coupling


L型联轴器
L type Coupling


制动轮联轴器
Braking-wheel Coupling


链条联轴器
Chain Coupling


轮胎联轴器
Tyre Coupling



非标件
Non-standard Part


芯型联轴器
Core-type Coupling


链条联轴器
Chain Coupling


蛇簧联轴器
Grid Coupling


HM型联轴器
HM Coupling


星型联轴器
Star type Coupling


鼓型齿式联轴器
Drum gear Coupling


铝合金联轴器
Aluminium alloy Coupling


铝合金联轴器
Aluminium alloy Coupling


铝合金联轴器
Aluminium alloy Coupling


工程机械
Engineering Machinery


NM联轴器
NM Coupling


轮胎联轴器配件
Part of Tyre Coupling


WH联轴器
WH Coupling


芯型橡胶体
Core-type Rubber Part

铝合金钟罩
Aluminium alloy Clock Cover

NL联轴器
NL Coupling

TGL联轴器
TGL Coupling

工程机械
Engineering Machinery